



An excellent option for delivering light on the ground, or for feature accent lighting without obstruction from low level plantings. Aim and tilt adjustability, a choice of finishes and long service life are all part of the package. The Grevillea also features Lumascape's d5 driver technology as a standard inclusion, providing a high level of control. When high output is required, it can be deployed in its full output 6 W configuration or if a lower level of light is required, it can be set as low as 0.6 W (either by the factory or in the field).



### Performance

Static White & Color <sup>1</sup>	Lumen Output (lm)	Efficacy (lm/W)	Peak Intensity (cd)
● 2,700 K (80 CRI)	–	–	–
● 3,000 K (80 CRI)	540	72	7,246
● 4,000 K (80 CRI)	556	75	7,417
● Blue	–	–	–

<sup>1</sup> Static white lumen output values are based on 6 W luminaire with 14° lens

Beam Angles	14°, 25°, 30°, 40°
-------------	--------------------

### Electrical

LED Power	6 W
Power Consumption	7.5 W maximum
Input Voltage	Low Voltage 24 Vdc

### Control

Protocols	PWM (0-10 V to PWM, DMX to PWM and DALI to PWM converters available)
-----------	----------------------------------------------------------------------


### Physical

Housing	Polished copper or powder-coated aluminum
Finish	Superior 9-step powder-coating process, including marine-grade epoxy undercoat and polyester top coat
Installation	Spike mount (landscape and planters)
Ambient Operating Temperature	-4 °F to 104 °F (-20 °C to 40 °C)
Surface Temperature	≤149 °F (65 °C) HumanTouch™ compliant


### Certification & Compliance

IP Rating	IP65
Certifications	CE, RCM


Dimensions

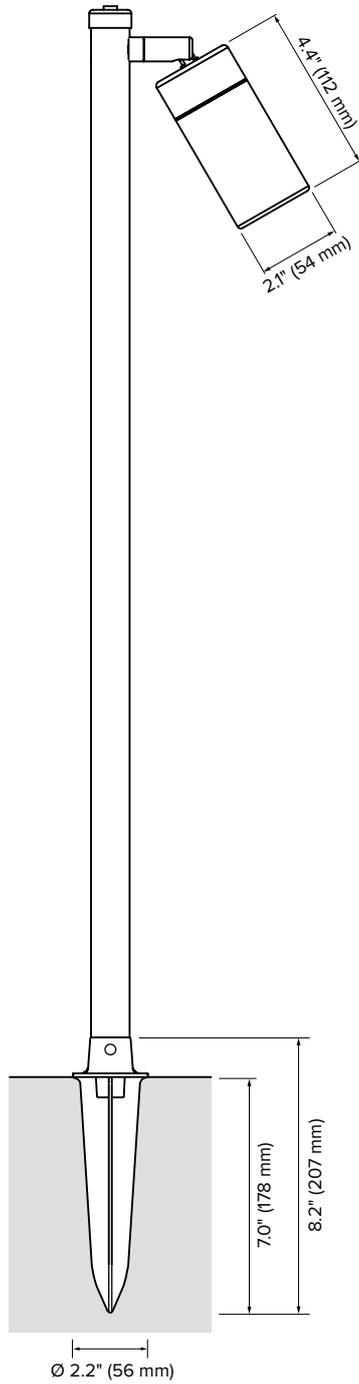

Specification Matrix

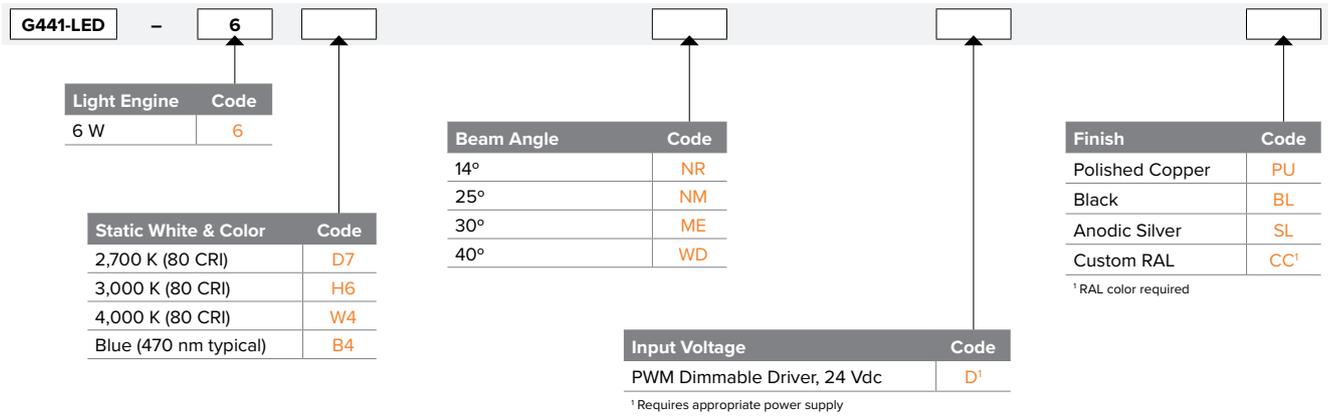

**Network Topology – Static Color (DMX/DALI)**

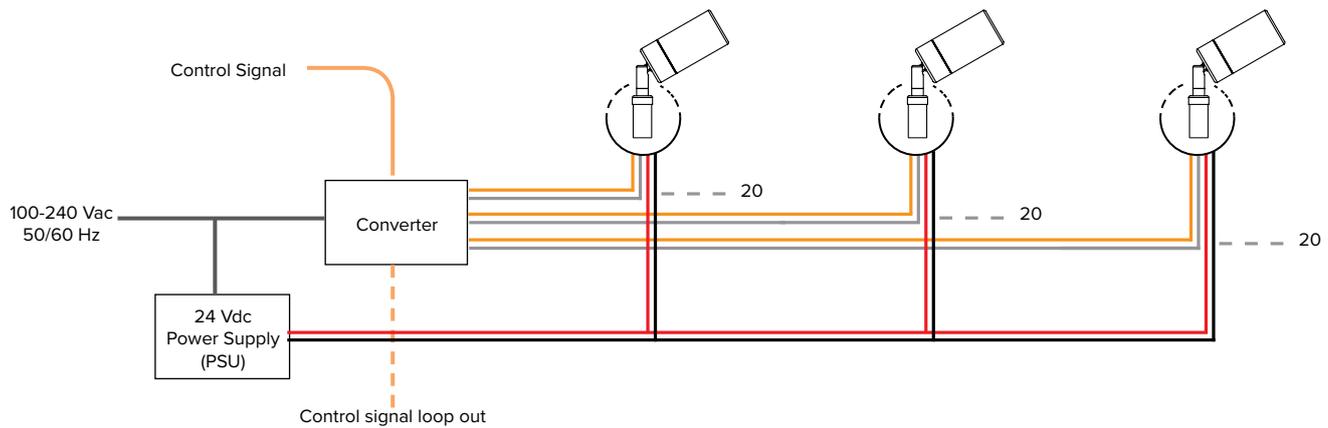


**Up to 20 luminaires per run under the following conditions:**

- Up to three (3) individually addressed dimmable channels
- Up to 20 luminaires per dimmable channel
- Luminaires driven by integral LED drivers
- Luminaires powered through individual power supplies or
- Luminaires powered through LS67100 PWM controller only (up to 100W total)
- Refer to 'Maximum Circuit Load' table for circuit limitations
- Always observe local electrical codes for branch circuit current limitations

**Control Protocols**

- DMX** For DMX control signal, use LS67100 DMX to PWM converter
- DALI** For DALI control signal, use LSLED-RGBDIM-DALI converter

**Network Topology – Static Color (0-10 V)**

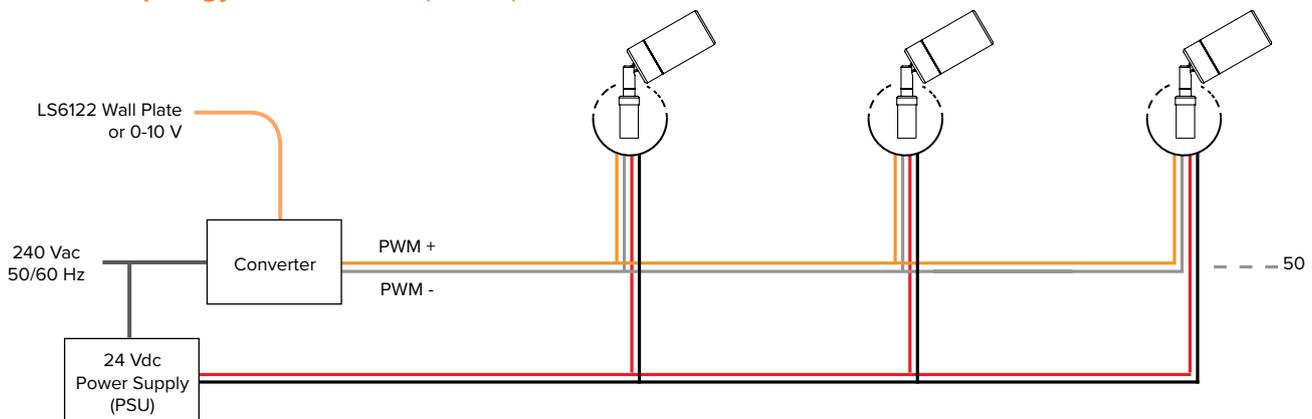

**Note:**

Reversed dimming signal polarity connection at the LS6125-2 is correct. Observe polarity connections in all other locations.

**Up to 50 luminaires per run under the following conditions:**

- Stand-alone static color-dimming solution
- Up to 50 luminaires per dimmable channel
- Luminaires driven by integral LED drivers using LS6122 wall plate option
- Luminaires powered through individual or shared power supplies
- Refer to 'Maximum Circuit Load' table for circuit limitations
- Always observe local electrical codes for branch circuit current limitations

**Control Protocols**

- 0-10 V** For 0-10 V control signal, use LS6125-2 0-10 V to PWM converter

**Maximum Circuit Load**

	LSLED40W	LSLED120W	LSLED240W	LSLED320W	LSLED480W	LSLED600W
Output Voltage	24 Vdc	24 Vdc	24 Vdc	24 Vdc	24 Vdc	24 Vdc
Wattage	40 W	120 W	240 W	320 W	480 W	600 W
G441-LED, 6 W	3	11	22	30	45	56