





Project Name	
Type	
Part Number	
Quantity	
Notes	

Product Overview

The Ridge RG4 is a modern and stylish surface-mounted wall light that boasts a smooth, angular design, easily installed in a range of height and spacing configurations. Its design and wide beam distribution allows for greater spacing opportunities, maintaining excellent uniformity levels to suit exterior and interior environments.

Features

Lumen Output	700 lm
Power Consumption	10 W
Typical Lifetime	72,000 Hrs (L90 B10)
Input Voltage	International: 220-240 Vac, 50 Hz   North America: 120/277 Vac, 60 Hz
IP Rating	IP65
IK Rating	IK9
Compliance	
Color Options	

Technology









# Specifications

Hero - LS1282

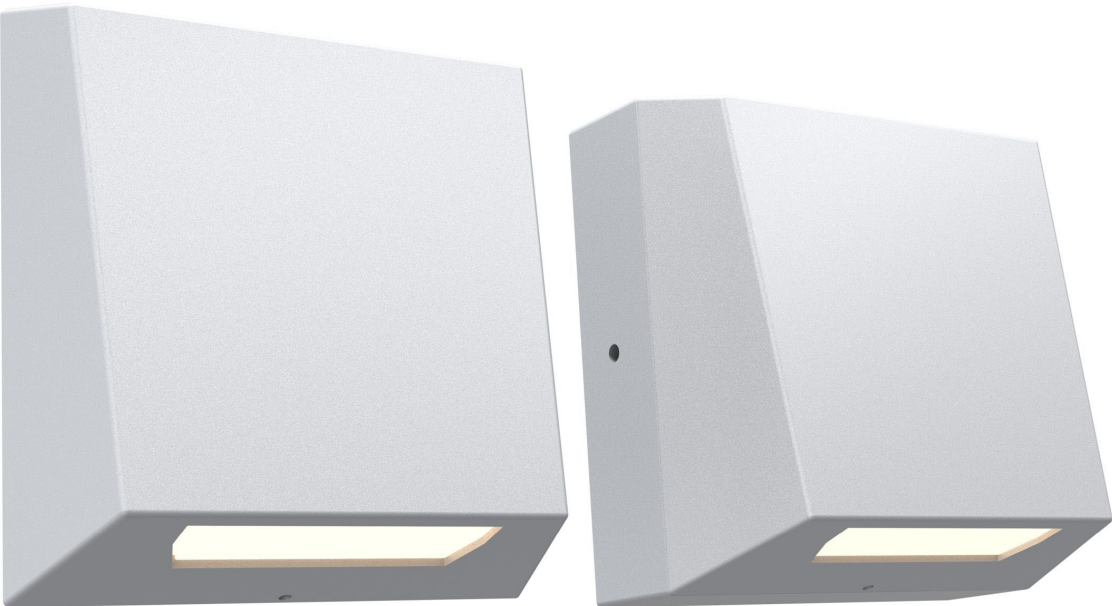



## International

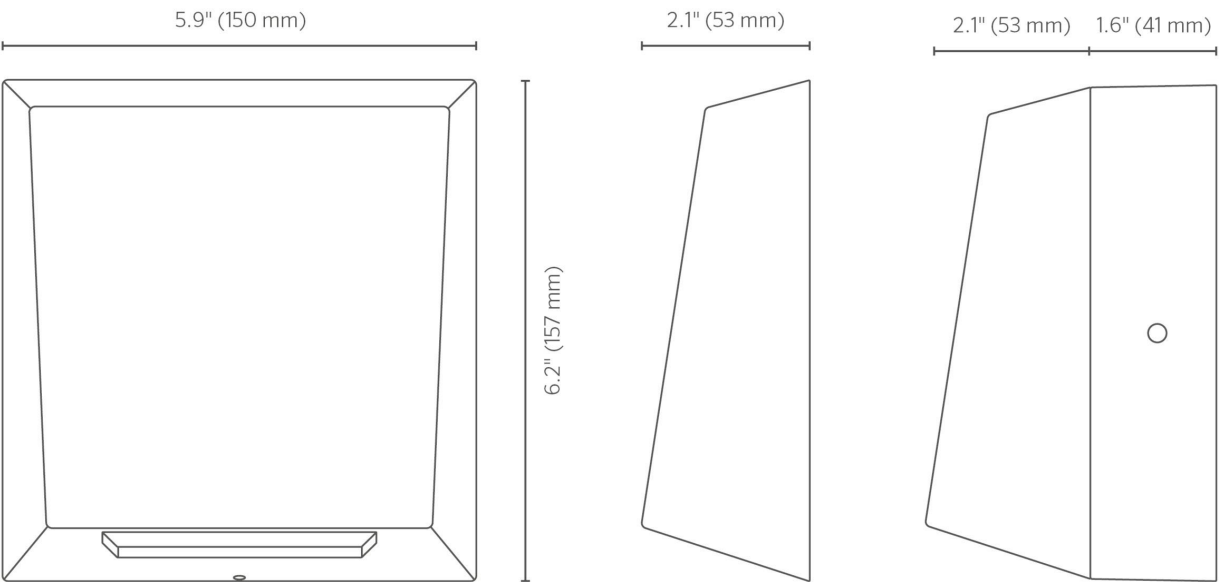

Side View With Wiring  
Back Box

DarkSky Option

DarkSky Louvre added

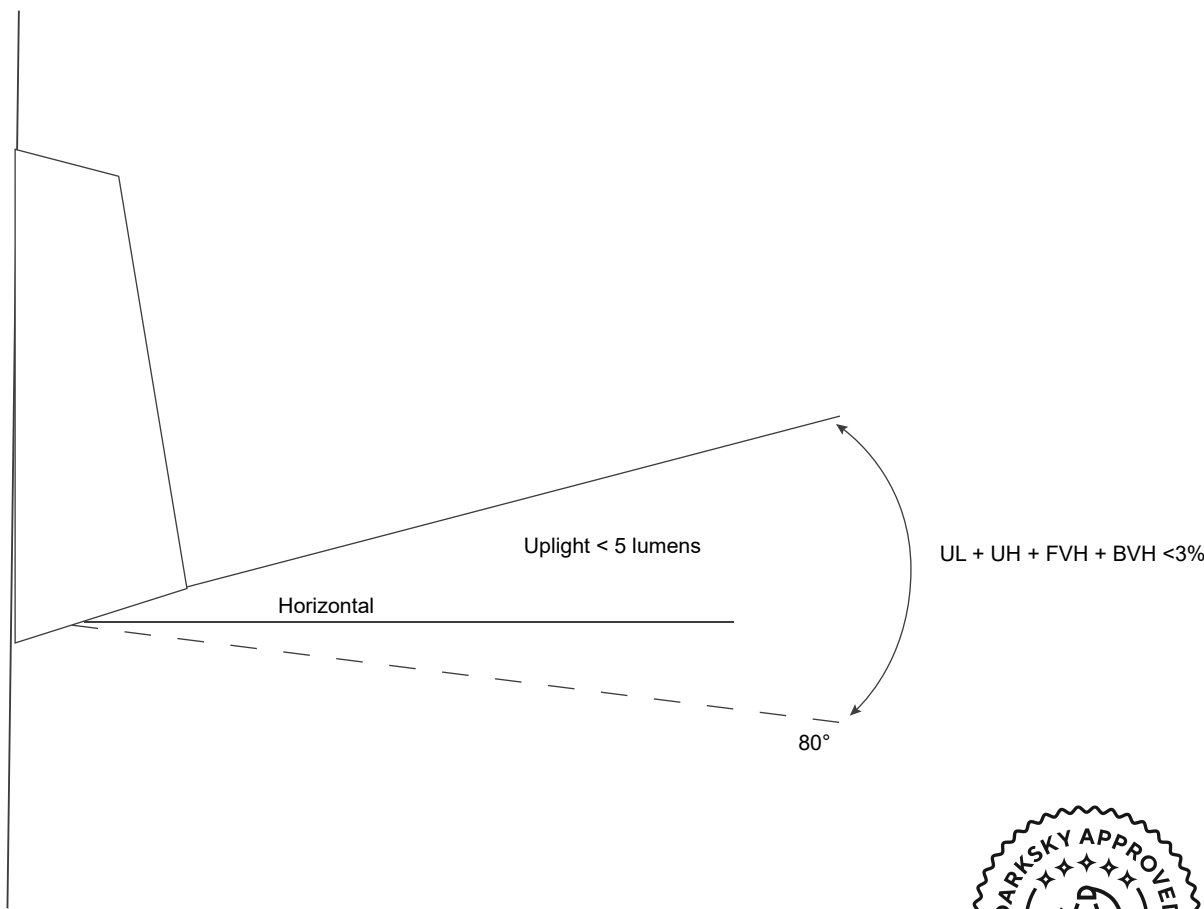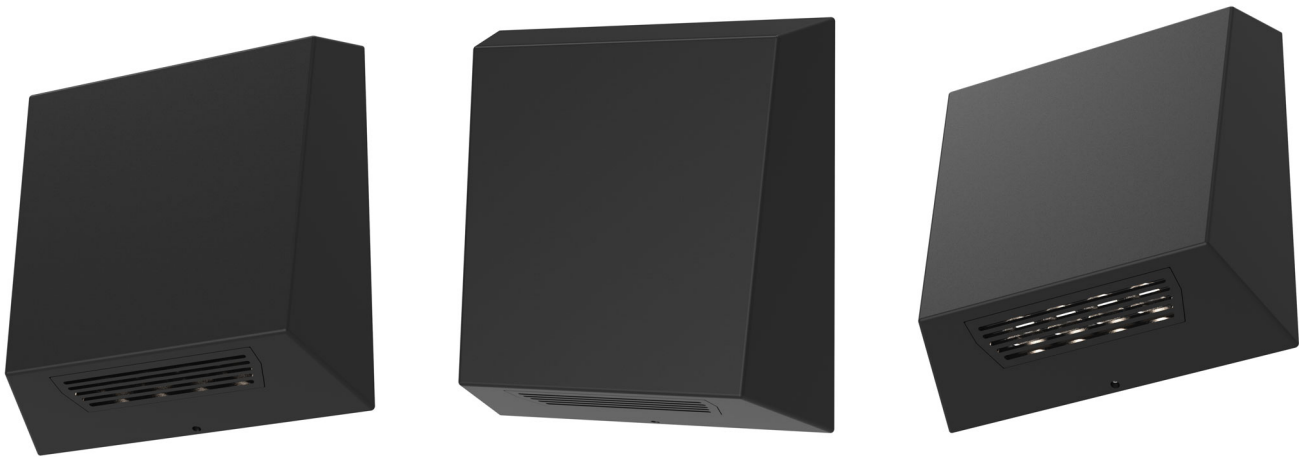

## Configuration

For complete and up-to-date product options, configure the LS1282 using our online [product configurator](#).

LS1282						
Code	Power Consumption	Light Source	Beam Angles	Input Voltage	Control	Finish

### Power Consumption

For all PowerSync Controlled Luminaires

☐ 10 W (10D)

### Light Source

☐ Static White (827)  
2,700 K (80 CRI, 3  
SDCM)

☐ Static White (830)  
3,000K (80 CRI, 3  
SDCM)



☐ Static White (840)  
4,000 K (80 CRI, 3  
SDCM)



### Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

☐ Wide (MD)  
100° x 75°

### Input Voltage

☐ 220 to 240 Vac, 50  
Hz (01)  
Line Voltage



☐ 120/277 Vac, 60  
Hz (09)  
Line Voltage













### Control

☐ DALI (DL)

☐ 0-10V (AH)

Finish


Custom powder coat colours are available. Please consult factory.

<input type="checkbox"/> <b>Black (BL)</b> RAL9004 from RAL Classic collection (formerly CB)		<input type="checkbox"/> <b>Anthracite Gray (AG)</b> RAL7016 from RAL Classic collection		<input type="checkbox"/> <b>Basalt Gray (BT)</b> RAL7012 from RAL Classic collection	
<input type="checkbox"/> <b>Graphite Gray (GH)</b> Graphite Gray		<input type="checkbox"/> <b>Anodic Silver (SL)</b> RAL9006 from RAL Classic collection (formerly CS)		<input type="checkbox"/> <b>White (WT)</b> RAL9016 from RAL Classic collection	
<input type="checkbox"/> <b>Dark Bronze (DB)</b> RAL8019 from RAL Classic collection		<input type="checkbox"/> <b>Latte (LT)</b> RAL7006 from RAL Classic collection		<input type="checkbox"/> <b>Dark Aluminium (DA)</b> RAL9007 from RAL Classic collection	
<input type="checkbox"/> <b>Custom RAL (CC)</b> A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set- up fee.					

Accessories


Mounting & Installation

Specify Separately

<input type="checkbox"/> <b>Wiring Back Box (LS6336)</b> Surface mounted wiring back box.	
---	---

Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

<input type="checkbox"/> <b>Custom Color Setup Fee (Custom RAL Color)</b> Custom RAL colour setup fee	
---	---

## Dark Sky Configuration

For complete and up-to-date product options, configure the LS1282 using our online [product configurator](#).



LS1282	10D		DY			
Code	Power Consumption	Light Source	Beam Angles	Input Voltage	Control	Finish

### Power Consumption

For all PowerSync Controlled Luminaires

☐ 10 W (10D)

### Light Source

☐ **Static White (827)**  
2,700 K (80 CRI, 3  
SDCM)

☐ **Static White (830)**  
3,000K (80 CRI, 3  
SDCM)



### Beam Angles

Published angles may vary slightly to photometric data. Please refer to IES files where relevant.

☐ **DarkSky Louver (DY)**  
Required louver for DarkSky compliance.  
Black Only.

### Input Voltage

☐ **220 to 240 Vac, 50  
Hz (01)**  
Line Voltage



☐ **120/277 Vac, 60  
Hz (09)**  
Line Voltage













### Control

☐ DALI (DL)

☐ 0-10V (AH)

Finish


Custom powder coat colours are available. Please consult factory.

- ☐ **Black (BL)**  
RAL9004 from RAL  
Classic collection  
(formerly CB)
- 
- ☐ **Anthracite Gray (AG)**  
RAL7016 from RAL  
Classic collection
- 
- ☐ **Basalt Gray (BT)**  
RAL7012 from RAL  
Classic collection
- 
- ☐ **Graphite Gray (GH)**  
Graphite Gray
- 
- ☐ **Anodic Silver (SL)**  
RAL9006 from RAL  
Classic collection  
(formerly CS)
- 
- ☐ **White (WT)**  
RAL9016 from RAL  
Classic collection
- 
- ☐ **Dark Bronze (DB)**  
RAL8019 from RAL  
Classic collection
- 
- ☐ **Latte (LT)**  
RAL7006 from RAL  
Classic collection
- 
- ☐ **Dark Aluminium (DA)**  
RAL9007 from RAL  
Classic collection
- 
- ☐ **Custom RAL (CC)**  
A one-off custom color setup fee applies. Click on 'More Info' button to add to your enquiry. Contact Lumascape for volume discount on set-up fee.
- 

Accessories

Mounting & Installation

Specify Separately

- ☐ **Wiring Back Box (LS6336)**  
Surface mounted wiring back box.
- 

Custom Color

A one-off setup fee applies for each custom color per order. Add to your enquiry.

- ☐ **Custom Color Setup Fee (Custom RAL Color)**  
Custom RAL colour setup fee
- 